

# MZH 3042L


# MZH 3062L

# MZH 3072L installed sound goosenecks

### FEATURES

- Sturdy and elegant metal gooseneck for unobtrusive miking
- RF shielding against intermodulation from wireless equipment/devices
- LED light ring for speech indication
- ac/dc lightring powering

The MZH 3042L, MZH 3062L and MZH 3072L are sturdy and elegant metal goosenecks with two flexible elements for use with the ME 34, ME 35 and ME 36 microphone capsules. The LED light ring indicates an active microphone. The rugged, matte black goosenecks are fitted with a balanced floating XLR-5M connector, enabling the microphone to be powered from 12 - 48V phantom power. Two pins are dedicated for power supply of the LED light ring.

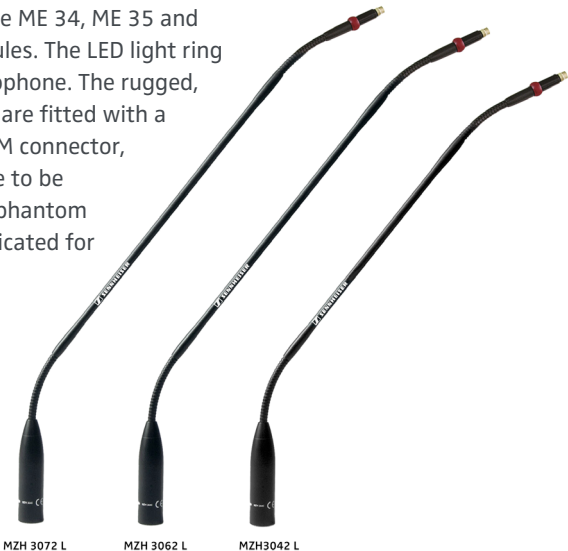

### ARCHITECT'S SPECIFICATIONS

The unit shall be streamlined in appearance, with a boom diameter of 8 mm (.31"), an overall length of 40 cm (15.75"), 60 cm (23.6"), or 70 cm (27.5"), and a double bend to facilitate precise positioning. It must also be finished with a durable anti-reflective matte black coating and have a pre-amp housed within its XLR-5 connector housing. The unit must be mountable using a table stand, direct to surface receptacle or via a silent shock mount system. The unit shall accept the ME34, ME35 and ME36 microphone capsules. The unit shall be a Sennheiser MZH 3042L. The unit shall be a MZH 3062L. The unit shall be a MZH 3072L.


### TECHNICAL DATA

|                                     |                  |
|-------------------------------------|------------------|
| Connection .....                    | XLR 5            |
| Phantom Powering.....               | P 12 - P48 V     |
| Powering voltage lightring .....    | 8 - 30 V         |
| Current consumption lightring ..... | 18 mA            |
| Lightring connection polarity.....  | no polarity      |
| Coating.....                        | matte black      |
| Diameter .....                      | 6 mm (0.24" )    |
|                                     | 8 mm (0.32" )    |
|                                     | 8 mm (0.32" )    |
| Length.....                         | 415 mm (16.34" ) |
|                                     | 615 mm (24.21" ) |
|                                     | 715 mm (28.15" ) |
| Number of flexible elements .....   | 2                |
| Weight (goosenecks).....            | 110 g (35 oz.)   |
|                                     | 130 g (41 oz.)   |
|                                     | 135 g (43 oz.)   |
| Delivery includes .....             | MZH 3042L        |
|                                     | MZH 3062L        |
|                                     | MZH 3072L        |


## MZH 3042L MZH 3062L MZH 3072L installed sound goosenecks

### DIMENSIONS


#### MZH3042L

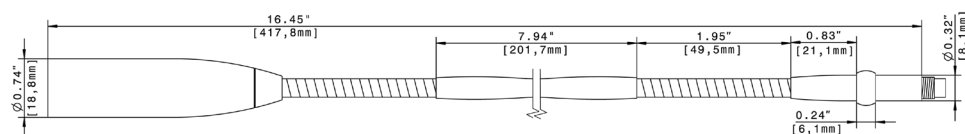


#### MZH3062L

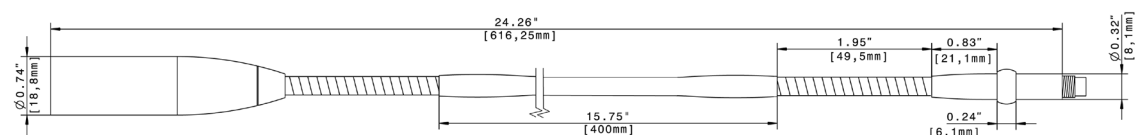

#### MZH3072L

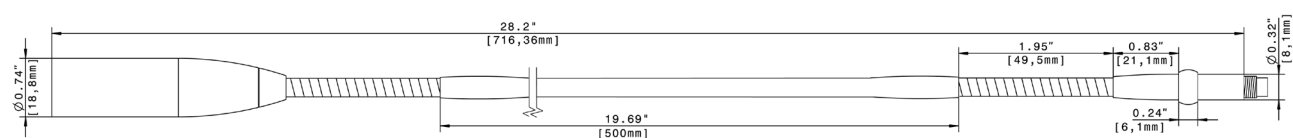

### CONNECTIVITY

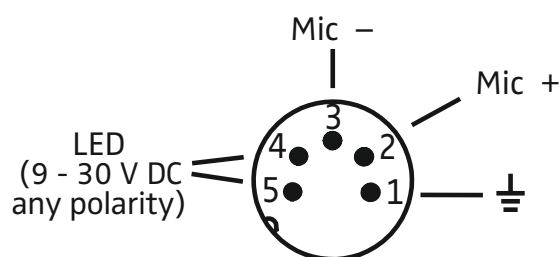

### PRODUCT VARIANTS

MZH 3042-L, black

Cat. No. 009437

MZH 3062-L, black

Cat. No. 504609

MZH 3072-L, black

Cat. No. 504610

### RECOMMENDED ACCESSORIES

MZT 30L, installation XLR5F connector

Cat. No. 009446

MZS 31, shockmount

Cat. No. 005087

Sennheiser electronic GmbH & Co. KG  
Am Labor 1, 30900 Wedemark, Germany  
www.sennheiser.com

 **SENNHEISER**