


PD-32SH/GERMAN

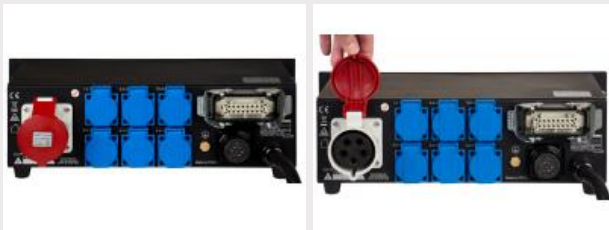

:: Product Description

- * This 3-phase power distributor is designed to improve safety in both mobile, rental and fixed installations.
- * Choice of different outputs for maximum flexibility (rental companies!):
 - * o 6x earthed 16A mains outlet sockets: (2 sockets per phase, German 16A blue schukos (CEE 7/4))
 - * o 1x 16PIN industrial rectangular connector: output for use with standard wiring for rental multi-cables
 - * o 1x 19PIN industrial round connector: output for use with standard wiring for rental multi-cables
- * Designed and build to the highest European and international safety standards.
- * Oversized internal wiring for increased reliability!
- * 32A 4pole circuit breaker protects ALL outputs, including the 32A output to the next unit. In case of emergency all 3 phases AND the neutral are disconnected!
 - * The 30mA, 4pole residual current circuit breaker prevents electrical shocks
 - * Accurate digital 3-digit voltmeters per phase
 - * Accurate digital 3-digit ampere meters per phase
 - * Two C16 (16A - 1P+N) automatic circuit breakers per phase
 - * 1,5m long mains input cable (3x 32A, 5wire), equipped with CEE (3P+N+E) 32A inlet plug
 - * CEE (3P+N+E) outlet socket (3x 32A, 5wire) for bypass
 - * Extremely robust 19"/3U metal housing

:: Technical Information

*

Power Input: IEC60309-standard, CEE-32A industrial plug

380V - 400V / 50Hz, 3phase, 5wire (3P+N+E)

- * Maximum overall power: 22.080Watt (3x 32A)
- * Maximum power per phase: 7.360Watt (32A)
- * Maximum power per output: 3.680Watt (16A)
- * Protection class: class I (only to be connected to class I outlets)
- * Max. Leakage current: 30mA
- * Automatic fuses / phase: 2x C16 (In=16A, instantaneous tripping current = 5x In)
- * Diameter Power cord: 5x 6mm²; (H07RN-F 5G6)
- * Diameter internal wiring: 32A-wires: 10AWG (5,2mm²;) - 16A-wires: 14AWG (2,1mm²;)
- * Size: 19" , 3 unit high. Depth = 258mm
- * Weight: 8.8 kg