

Photometric Report

SAM0904920002 LED zoomTrack light 30W (NW - wide), Zoom wide, Ordercode

REPORT SUMMARY

Output

Total Lumens:	2155 Lumen
Peak Intensity:	2322 candela
Illuminance @ 5m:	93 lx
CRI:	92,3
CCT:	4385 K



Optical


Beam Angle (50%)	59,7 °
Field Angle (10%)	86,4 °

Conditions:


Power Supply:	223 V
Power:	28,3 W
Current:	0,128 A
Power Factor:	0,99

MEASUREMENTS


Angular Beam Distribution

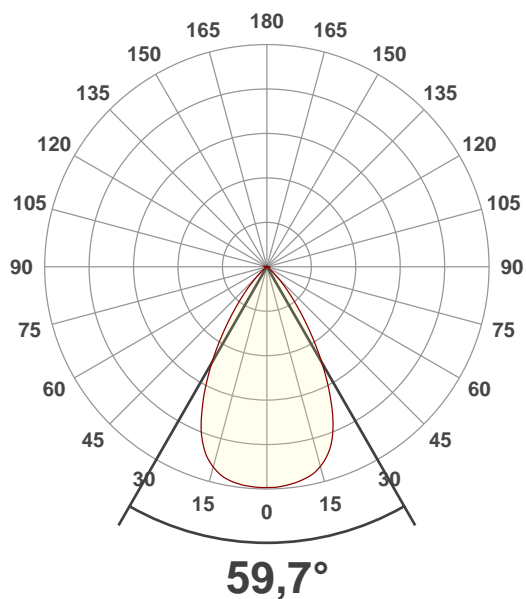

Spectral Distribution

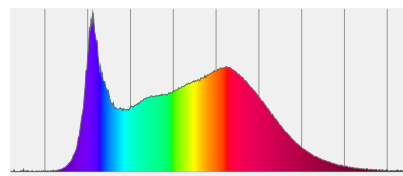

CIE 1931

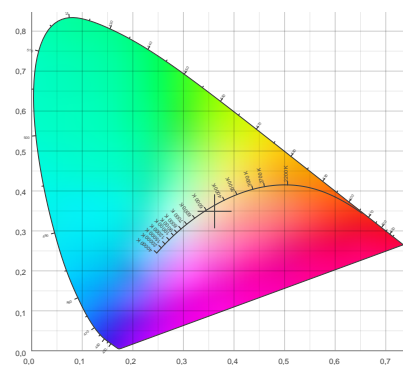


Photometric Report




SAM0904920002 LED zoomTrack light 30W (NW - wide), Zoom wide, Ordercode

BEAM DETAILS

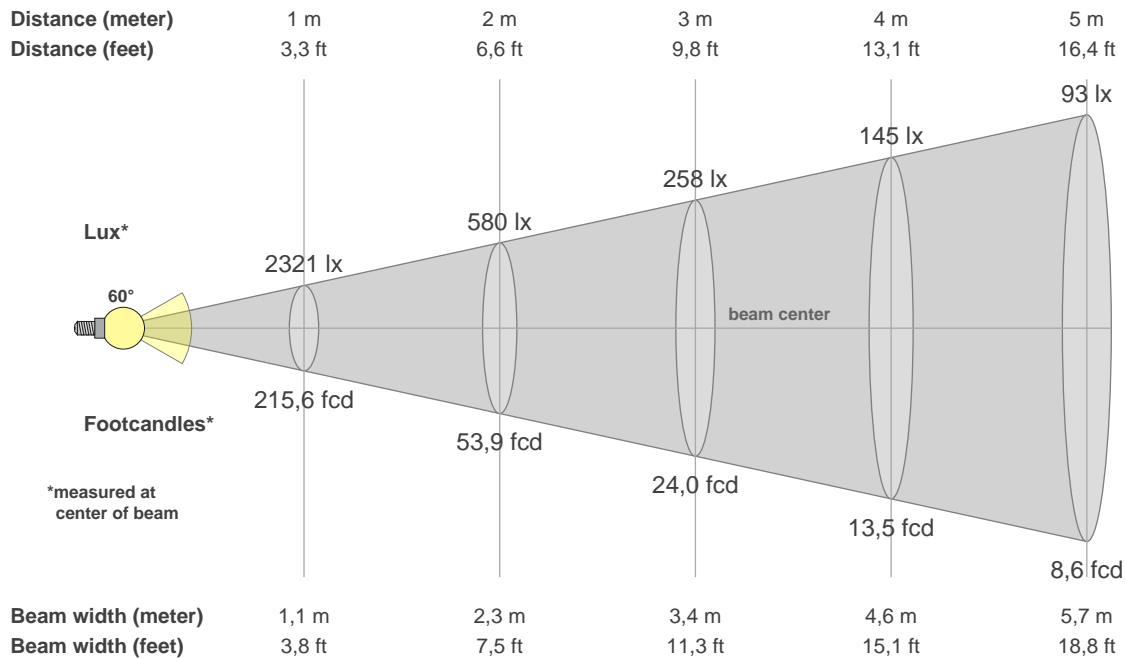

Beam Illuminances from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
2321lx	580lx	258lx	145lx	93lx	64lx	47lx	36lx	29lx	23lx	19lx	16lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx
215,6fcd	53,9fcd	24fcd	13,5fcd	8,6fcd	6fcd	4,4fcd	3,4fcd	2,7fcd	2,2fcd	1,8fcd	1,5fcd	1,3fcd	1,1fcd	1fcd	0,8fcd	0,7fcd	0,7fcd	0,6fcd	0,5fcd

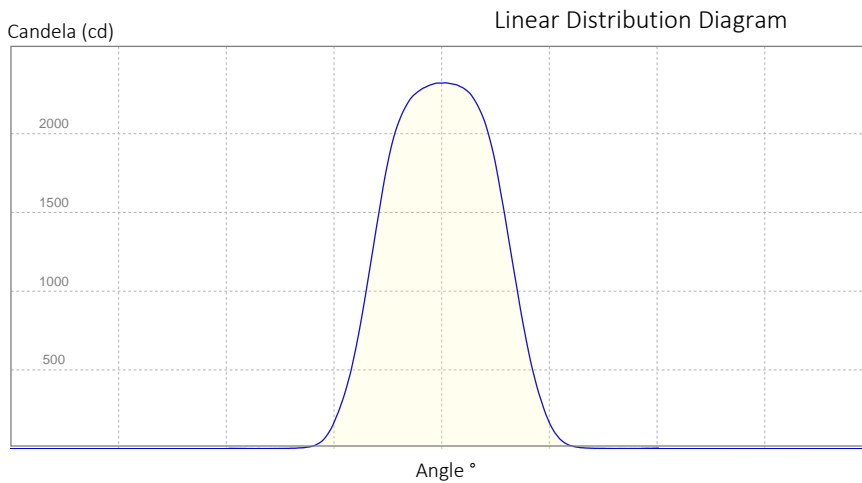


Beam Angle (50%): 59,7 °
 Field Angle (10%): 86,4 °
 Cutoff Angle (3%): 99 °

Photometric Report



SAM0904920002 LED zoomTrack light 30W (NW - wide), Zoom wide, Ordercode

POLAR DIAGRAMS

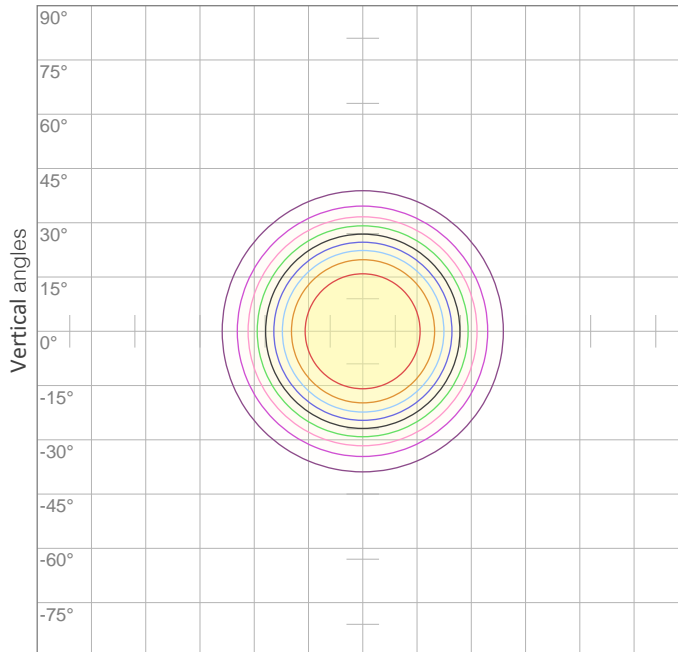


ISO candela diagram

10%	232 cd
20%	464 cd
30%	696 cd
40%	928 cd
50%	1161 cd
60%	1393 cd
70%	1625 cd

Conditions:

Number of c-planes: {C_PLANES}

Candela at center: 2321 cd

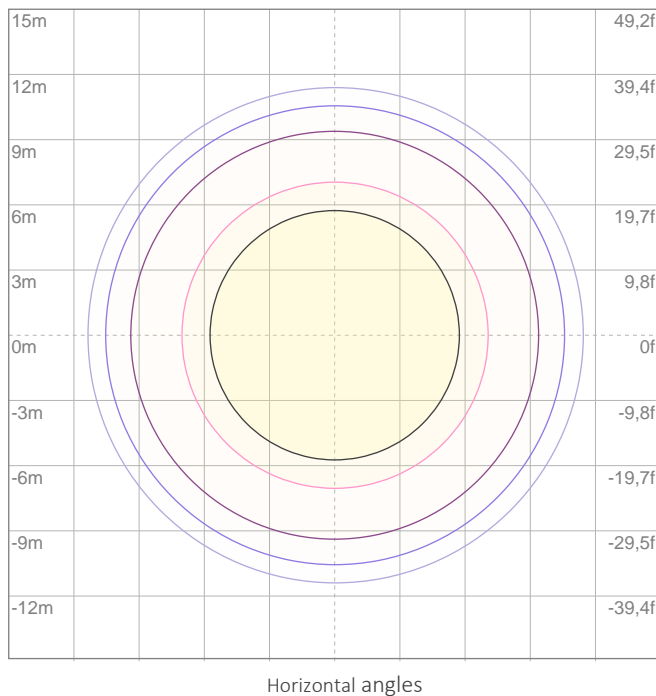

ISO lux diagram

3%	0,696 lx
5%	1,16 lx
10%	2,32 lx
30%	6,96 lx
50%	11,6 lx

Conditions:

Number of c-planes: 2

Lux at center: 23,2 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters (33 feet)

Photometric Report



SAM0904920002 LED zoomTrack light 30W (NW - wide), Zoom wide, Ordercode


CHROMATICITY REPORT

Total Lumens: 2155 lm
Peak Intensity: 2322 cd
Fixture Efficiency: 76 Lumen/Watt

Color Temperature: 4385 K
CRI: 92,3
CRI R9: 80,0
CQS: 91,5
TM-30 Rf: 89,1
TM-30 Rg: 97,9
 Δuv : -0,0076
1st Dominant Wavelength: 456 nm
2nd Dominant Wavelength: 612 nm



Spectral Distribution

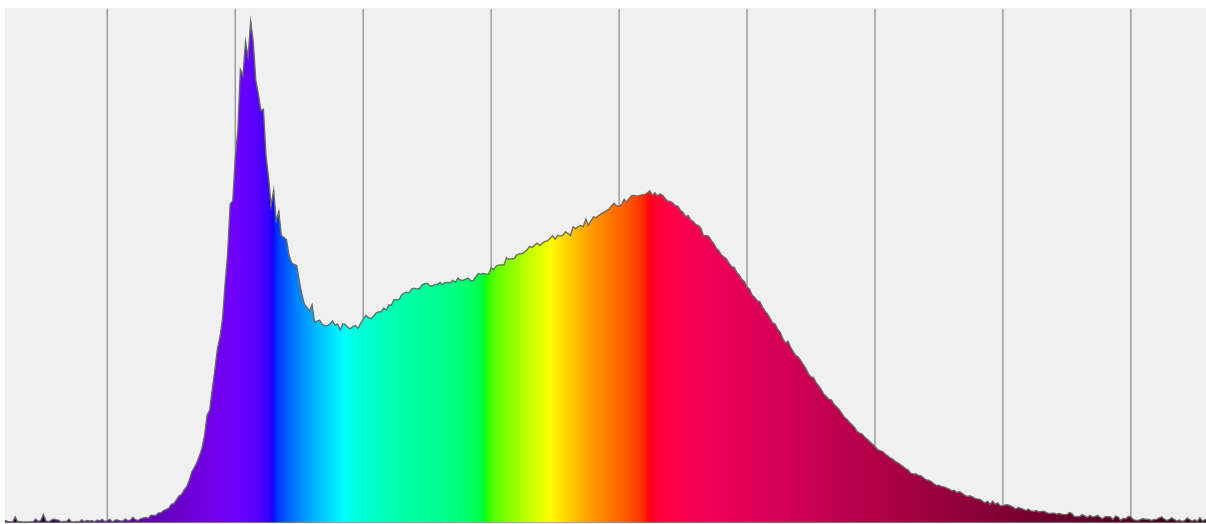

Color

4385 K
CIE 1931 Coordinates:
X: 0,362 Y: 0,349

Color Temperature

4385 K

CRI

92,3


Photometric Report




SAM0904920002 LED zoomTrack light 30W (NW - wide), Zoom wide, Ordercode

CHROMATICITY


CIE 1931

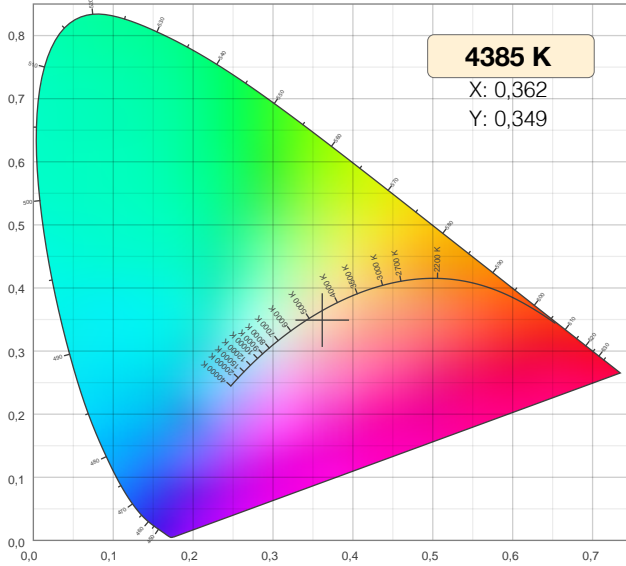


CIE 1931 - Detail

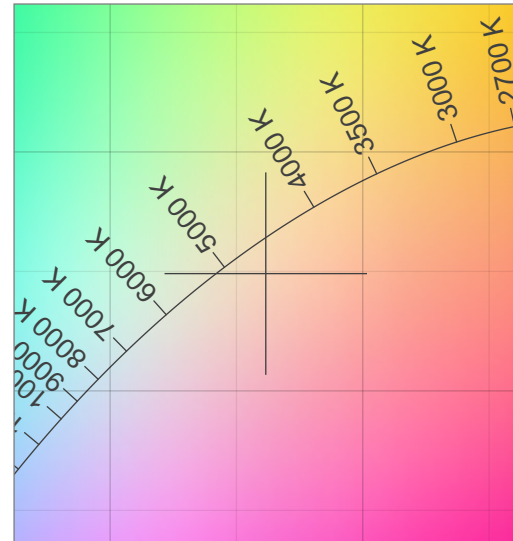

CRI: 92,3 (R1-R8)

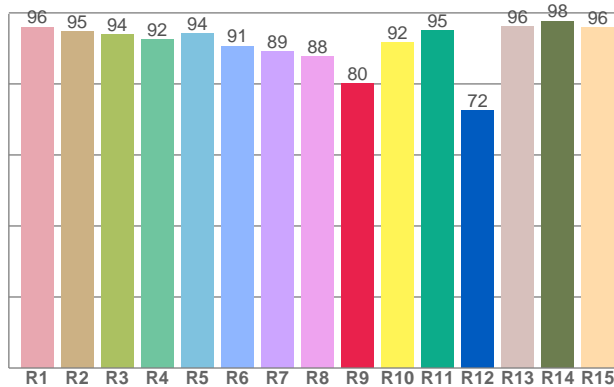

CQSI: 91,5

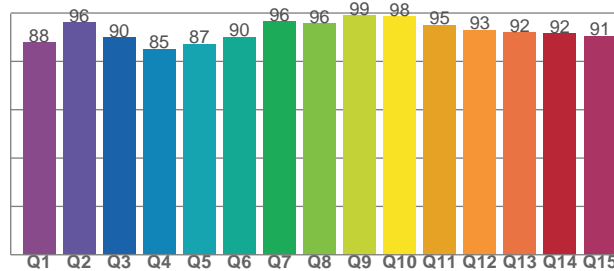

Photometric Report




SAM0904920002 LED zoomTrack light 30W (NW - wide), Zoom wide, Ordercode

TM-30-18 DETAILS


Rf 89,1
Fidelity index Rf

Rg 97,9
Gamut index Rg


Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	89	-4%	3%
2	93	-1%	2%
3	94	0%	2%
4	92	-3%	-2%
5	91	-6%	-2%
6	94	-3%	0%
7	90	-5%	3%
8	88	-3%	7%
9	85	0%	11%
10	85	2%	10%
11	86	6%	6%
12	90	5%	-2%
13	88	4%	-8%
14	93	-1%	-3%
15	82	3%	-12%
16	89	-4%	-2%

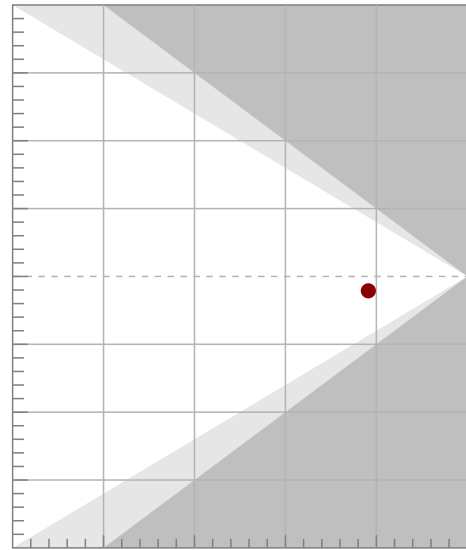

TM30-18 Color Vectors

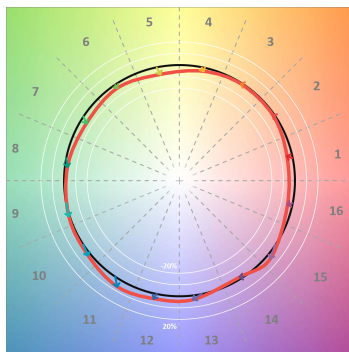


Rf by Hue Bin

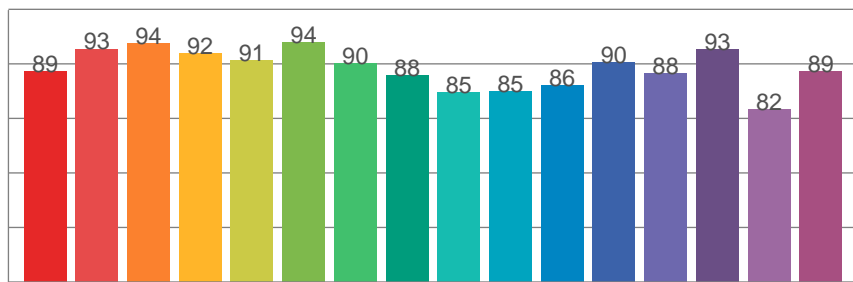

TM30 Color Distortion



TM30 Chroma Shift

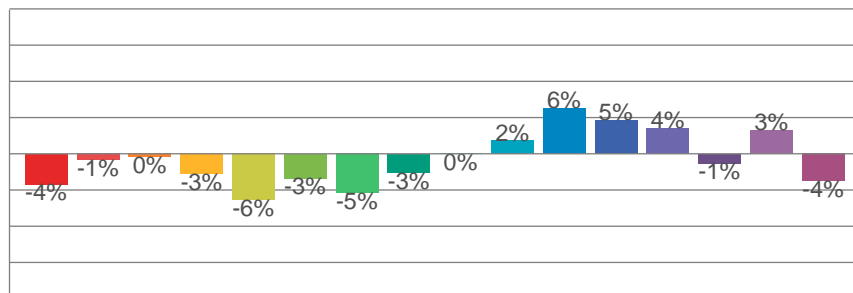

TM30 Color Fidelity Sample Chart

