

Audio Players

CD-156

Order No. 0212410



Stereo CD and MP3 player, with USB 2.0 interface, for hi-fi and PA applications.

- USB storage media can be connected directly (e.g. USB hard disk, USB flash drive)
- Anti-shock system
- Repeat function (repeat 1, repeat all), random play, standard operating functions
- Adjustable headphone output
- Supplied with infrared remote control with direct track selection
- 482 mm (19") rack installation with supplied mounting brackets, 2 RS
- Audio CD/CD-R/MP3 CD



Model	CD-156
Frequency range	20-20,000 Hz
THD	< 0.1%
Channel separation	> 80 dB
Dynamic range	> 90 dB
S/N ratio	> 80 dB
Output, analogue	2 V
Power supply	~ 230 V/50 Hz/25 VA
Dimensions	420 x 90 x 285 mm, 2 RS (w/o mounting brackets)
Weight	3.66 kg
Connections	1 x RCA L/R, 1 x 6.3 mm jack (headphones)

DMP-130MIXBT

Order No. 1000062




MP3 player and microphone line mixer

With this unit combination, it is possible to mix 3 audio signal sources. The integrated MP3 player can be switched between SD card, USB port and Bluetooth receiver.

- For USB and SD storage media
- Alphanumeric display
- Repeat function
- Preprogrammed sound adjustments
- 3 input channels with level control (mic, aux/MP3, line)
- Aux input and microphone input via front panel connection
- 2-way tone control and level control for the master output
- Infrared remote control for MP3 player
- Blue backlit LCD
- 482 mm (19") rack installation



Model	DMP-130MIXBT
Media	MP3, USB, SD, MMC
Frequency range	20-20,000 Hz
THD	< 0.1%
Channel separation	> 60 dB
Dynamic range	> 96 dB
S/N ratio	> 70 dB
Output, analogue	2 V (XLR, bal.) 1 V (RCA)
Power supply	~ 230 V/50 Hz/20 VA
Dimensions	482 x 44 x 165 mm, 1 RS
Weight	2.36 kg
Connections	1 x combo 6.3 mm/XLR (mic/line), 1 x 3.5 mm jack (aux in), 1 x RCA L/R (line in), 1 x RCA L/R (line out), 1 x XLR L/R, bal. (output)

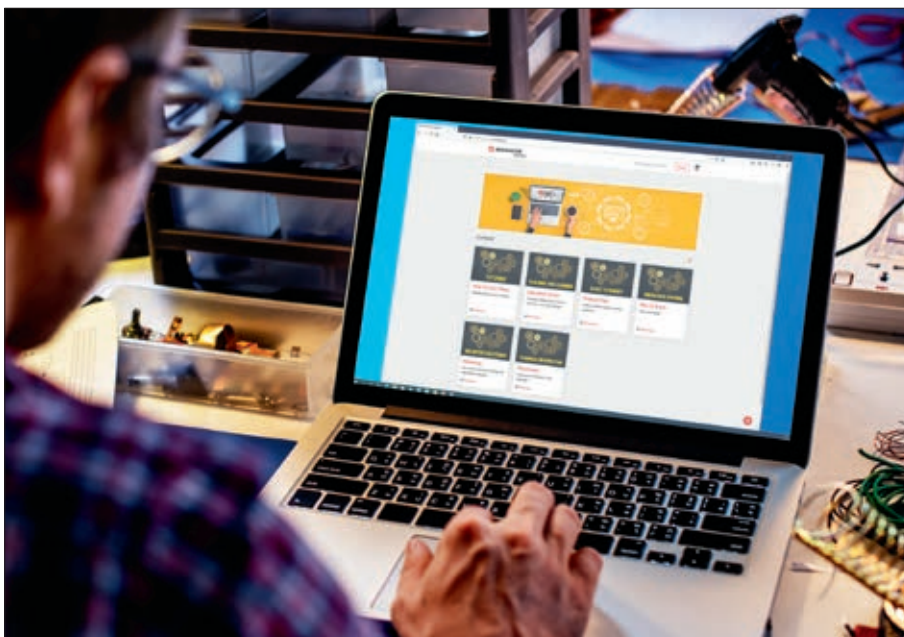

MONACOR
ACADEMY

www.monacor.com/academy